

HINGED DOOR FLOOR PROTECTION, KIT INSTRUCTIONS FOR CONTINUING AIRWORTHINESS

MODELS: EUROCOPTER AS350*

*With AFT LHS RHS hinged doors installed

Read all of the Instructions for Continuing Airworthiness thoroughly prior to performing any activities relating to this product

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 1 of 22





Table of Contents

<u>Section</u>	<u>Description</u>	<u>Page</u>
1	Description	2
2	Maintenance Manual Supplement	3
3	Installation & Removal Instructions	8
	Installation Instructions	9
	Removal Instructions	15
1	Illustrated Parts Breakdown	16

Notes

- 1. If changes to this document are required, Alpine Aerotech LP shall revise all pages and reissue the entire document.
- 2. Alpine Aerotech LP shall make any subsequent revisions of this document available free of charge upon request. Alpine Aerotech LP also recommends that the end user of this product periodically verify the revision level of this document.

Section 1: Description

Description

The following information provides a functional description of the Hinged Door Floor Protection, Kit as defined in Alpine Aerotech LP authority dataset AAL-312-020-001.

- The Floor Protection, Kits are rigid pieces of material that are installed atop the existing floor to
 protect it from dents and punctures associated with typical aircraft usage. This occurs most
 frequently during loading and unloading operations, but can also occur during small inflight
 shifts of said cargo.
- The Hinged Door Floor Protection, Kit when installed, adds additional protection to the floor panels, as it is manufactured from a material specifically designed to spread and attenuate energy.

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 2 of 22





Section 2: Maintenance Manual Supplement

General Notes

- 1. The following information defines the instructions for continuing airworthiness, repair allowances and airworthiness limitations for the item(s) referenced within this document.
- 2. Refer to the current revisions of the Eurocopter AS350 Master Service Manual for Instructions for Maintenance/Inspection with respect to the item(s) referenced within this document.
- 3. Refer to the Section 3: Installation & Removal Instructions and Section 4: Illustrated Parts Breakdown for the replacement and/or installation of the item(s) referenced within this section.
- 4. Scheduled inspection for the item(s) referenced within this document shall be accomplished in accordance with (IAW) the Inspection Procedures specified.
- 5. Repair allowances for the item(s) referenced within this document shall be accomplished IAW the Repair Procedures specified.
- 6. Limitations for the item(s) referenced within this document are IAW the Airworthiness Limitations specified.

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 3 of 22





Airworthiness Limitations

The Airworthiness Limitations section is approved by the Minister and specifies maintenance required by any applicable airworthiness or operating rule unless an alternative program has been approved by the Minister.

The Airworthiness Limitations section is FAA approved and specifies maintenance required under Sections 43.16 and 91.403 of the Federal Aviation Regulations unless an alternative program has been FAA approved.

Supplement to applicable Maintenance Manual, Chapter 4, Airworthiness Limitations Schedule

Notes

- 1. Refer to the applicable Master Service Manual, Chapters, for general information on airworthiness limitations and airworthiness limitation schedules.
- 2. Item(s) <u>not</u> listed in the Scheduled Airworthiness Limitations section within this document have an unlimited airworthiness life.

Scheduled Airworthiness Limitations

1. There are no airworthiness limitations associated with the item(s) referenced within this document.

Revision: A Date: 2016-04-22

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 4 of 22





Inspection Procedures

Supplement to applicable Maintenance Manual, Chapter 5, Inspection and Component Overhaul Schedule

Notes

- 1. Refer to the applicable Master Service Manual, Breakdown of the MSM Section 7, for general information on inspections, inspection definitions, inspection intervals, inspection methods and inspection schedules.
- 2. General Inspections, as indicated within this document, are defined as visual, non-thorough checks.
- 3. Detailed Inspections, as indicated within this document, are defined as visual and thorough, searching checks.
- 4. Perform Daily Inspections every day, prior to flight operation. If damage is detected, perform the 150 Hour/12 Month Inspections.
- 5. Perform 150 Hour/12 Month Inspections every 150 hours or every 12 months, whichever occurs first, prior to flight operation. If damage is detected, refer to the Repair Procedures section within this document.

Scheduled Inspections

1. Daily Inspections

Data Reference: Section 3: Installation and Removal Instructions

Section 4: Illustrated Parts Breakdown

- i. Perform a General Inspection on the Hinged Door Floor Protection, Kit, Installation for general condition.
- ii. Perform a General Inspection on the Hinged Door Floor Protection, Kit, Installation for proper security.

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 5 of 22





Scheduled Inspections

2. 150 Hour/12 Month Inspections

Data Reference: Section 3: Installation and Removal Instructions

Section 4: Illustrated Parts Breakdown

I. Perform a Detailed Inspection on all items to ensure proper security.

II. Perform a Detailed Inspection on all items/materials to ensure proper integrity.

III. Perform a Detailed Inspection on the Hinged Door Floor Protection, Kit to ensure that it is not delaminating.

IV. Perform a Detailed Inspection on all surfaces & locations with Velcro applied to ensure no damage has occurred to the aircraft floor.

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 6 of 22





Repair Procedures

1. Repairs to the item(s) referenced within this document are <u>not</u> permitted. Contact Alpine Aerotech LP for further information if repairs are required to the item(s) referenced within this document.

Revision: A Date: 2016-04-22

Doc. No.: AAL-312-035-701 Page 7 of 22





Section 3: Installation & Removal Instructions

Weight & Balance

 Part Number
 Description
 Weight
 Long. Arm
 Lat. Arm

 AAL-312-020-001
 Hinged Door Floor Protection, Kit
 13.87*
 69.457
 .024 LBL

 6.291 (Kg) 1.764 (m)
 .0006(m)

General Notes

- 1. All Installation Instructions shall be accomplished IAW standard aircraft practices. Refer to the current revision of the FAA publications AC 43.13-1B and AC 43.13-2B for details on standard aircraft practices.
- 2. All Dimensions are in imperial measures (inches/pounds).
- 3. Refer to Section 2: Maintenance Manual Supplement for instructions on maintenance for the item(s) referenced within this section.
- 4. Refer to the Section 4: Illustrated Parts Breakdown for the part numbers of the item(s) referenced within this section.

Alternate Part: DIN965-M4 x 16

Alternate Part: DIN7985-M4 x 18

Revision: A
Date: 2016-04-22
Doc. No.: AAL-312-035-701
Page 8 of 22


^{*} Total increase in weight to aircraft.





Installation Instructions

1. Gain access to the cabin floor, temporarily remove all seats, LHS collective, & foot pedals. Remove any existing floor board protection kits, door sills and door sill fasteners. Reference Figure 1.

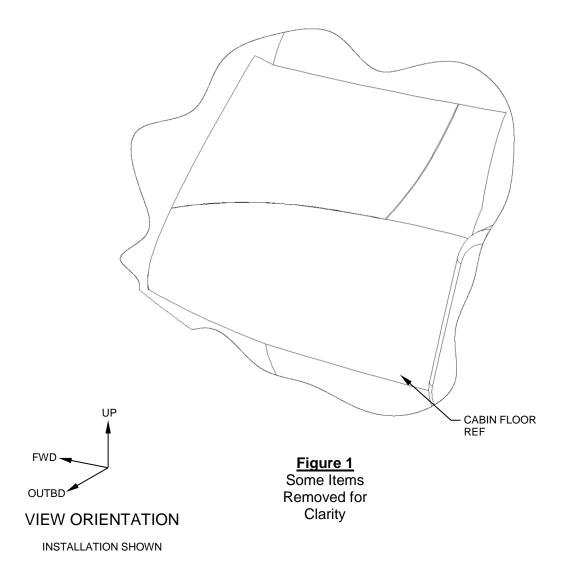

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 9 of 22






Installation Instructions

2. Pre-fit the FWD LHS Hinged Door Floor Protection, Assy (Item 1) & FWD RHS Hinged Door Floor Protection, Assy (Item 7) by lining up the outboard edge of the panel, assy with the existing floor panel edge. Reference Figure 2.

Note: Ensure clearance around cutout features, cyclic, collective, & pedals etc.

3. With the panel lined up use the pre-cut Ø.25 holes and a felt pen to mark out the locations for the Velcro, Details (Items 5, 6) and remove the panels (Items 1 & 6). Reference Figure 2.

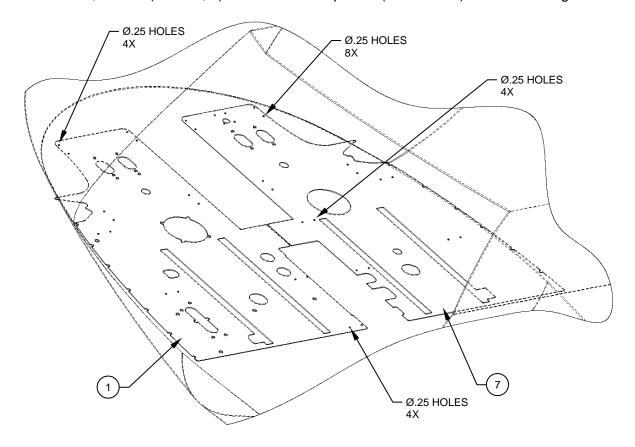




Figure 2
Some Items
Removed for
Clarity

VIEW ORIENTATION

Revision: A INSTALLATION SHOWN


Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 10 of 22





Installation Instructions

- 4. Clean the areas between the felt pen marks with alcohol taking care not to wipe away the felt pen marks.
- 5. Individually separate each Velcro, Detail (Item 6) off of the FWD LHS Hinged Door Floor Protection, Assy (Item 1) and Velcro, Detail (Items 13 & 14) off of the FWD RHS Hinged Door Floor Protection, Assy (Item 7) peel adhesive backing from the Velcro, Details (Items 6, 13 & 14).
- 6. Using the felt pen marks as reference points, apply the Velcro, Details (Items 6, 13 & 14) to the floor protection panel in their respective locations. Reference Figure 3. Apply adequate pressure to ensure a secure bond.

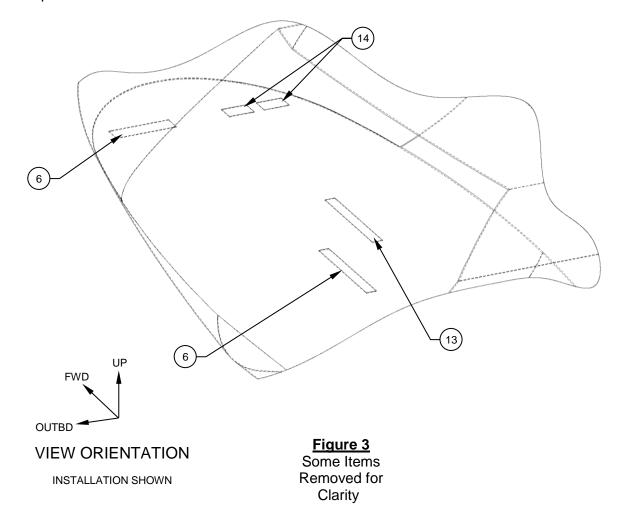

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 11 of 22






7. Re-install the FWD LHS Hinged Door Floor Protection, Assy (Item 1) & FWD RHS Hinged Door Floor Protection, Assy (Item 7) onto Velcro strips. Reference Figures 2 & 3.

Installation Instructions

8. Fit the AFT Hinged Door Floor Protection, Assy (Item 15) by centering the outboard edges of the panel, assy with the existing floor panel edges. Reference Figure 4.

Note: Ensure clearance around cutout features, cyclic, collective, & pedals etc.

9. If required use a sharp utility knife to remove **<u>EITHER</u>** the FWD or AFT set of knock out rectangles to allow the Aft seats to be properly fastened. Reference Figure 4

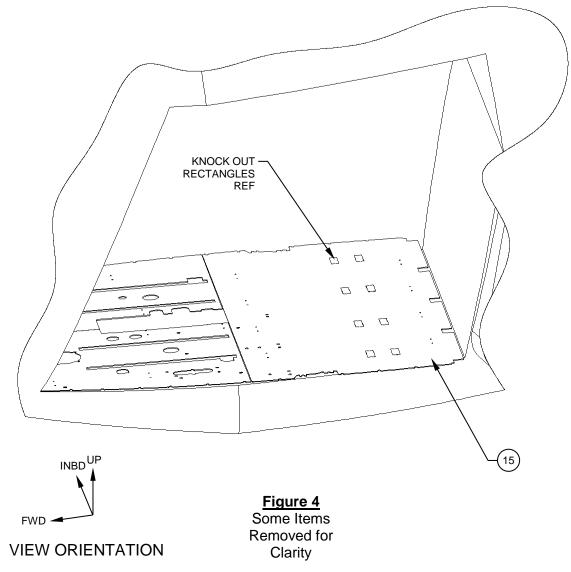

Revision: A INSTALLATION SHOWN

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 12 of 22






Page 13 of 22

1260 Industrial Road, Kelowna, B.C., Canada V1Z 1G5 Phone: (250) 769-6344 Fax: (250) 769-6303 admin@alpineaerotech.com

Installation Instructions

10. Install Door Sill, Details (Items 18 & 19) as shown. Reference Figure 5.

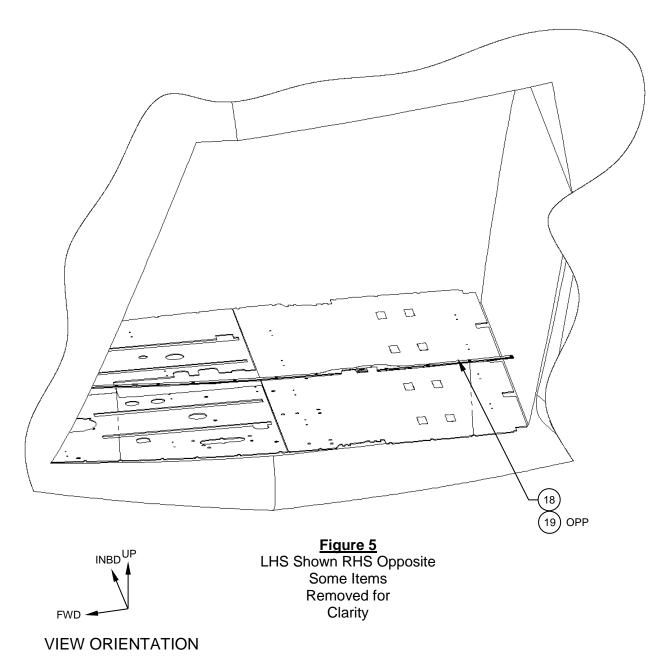


Revision: ANSTALLATION SHOWN

Date: 2016-04-22 Doc. No.: AAL-312-035-701





Installation Instructions

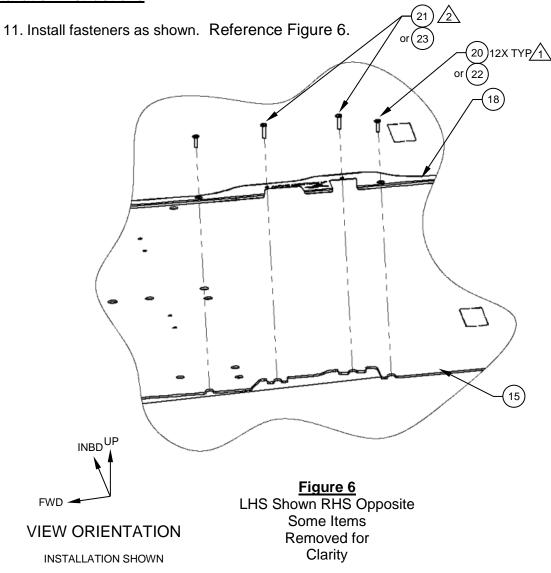

- 12. Installation complete
- 13. Perform a General Inspection of all items to ensure proper installation.

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 14 of 22





14. Update the aircraft logbook for the installation of Hinged Door Floor Protection, Kit.

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 15 of 22





Removal Instructions

- 1. For the removal the Hinged Door Floor Protection, Kit for either inspections, or mission configuration, the removal of the Hinged Door Floor Protection, Kit can be considered the opposite of installation for step 7, 8 & 9. For permanent removal, of Hinged Door Floor Protection, Kit remove all bonded Velcro, Details.
- 2. Perform a General Inspection of all items to ensure proper removal.
- 3. Update the aircraft logbook for the removal of the Hinged Door Floor Protection, Kit.

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 16 of 22





Section 4: Illustrated Parts Breakdown


FWD LHS Hinged Door Floor Protection, Assy Shown Item 1

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 17 of 22





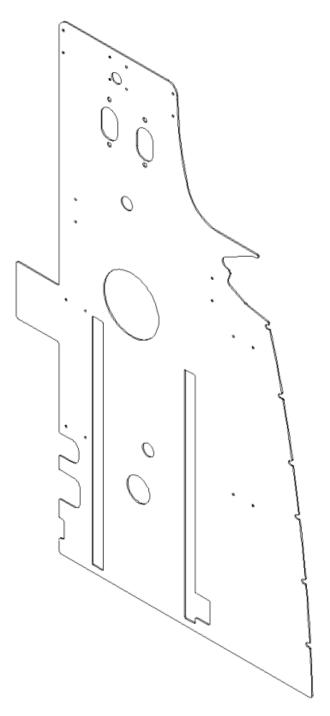


FWD RHS Hinged Door Floor Protection, Assy Shown Item 7

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 18 of 22





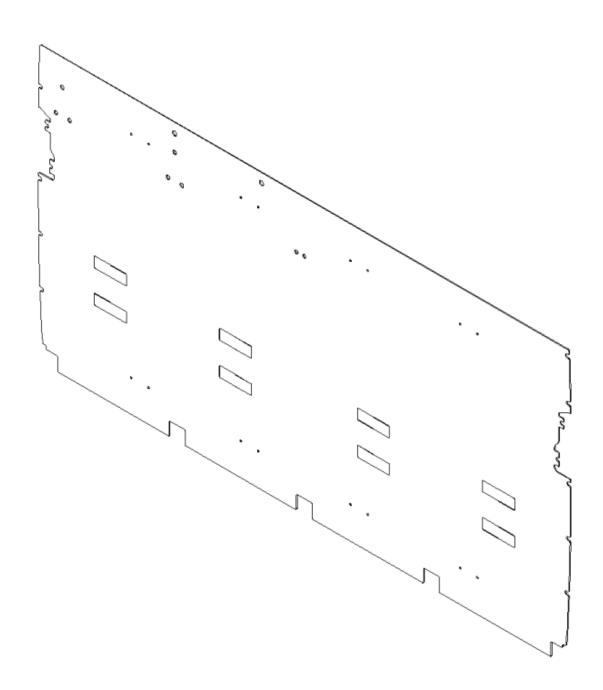


AFT Hinged Door Floor Protection, Assy Shown Item 15

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 19 of 22





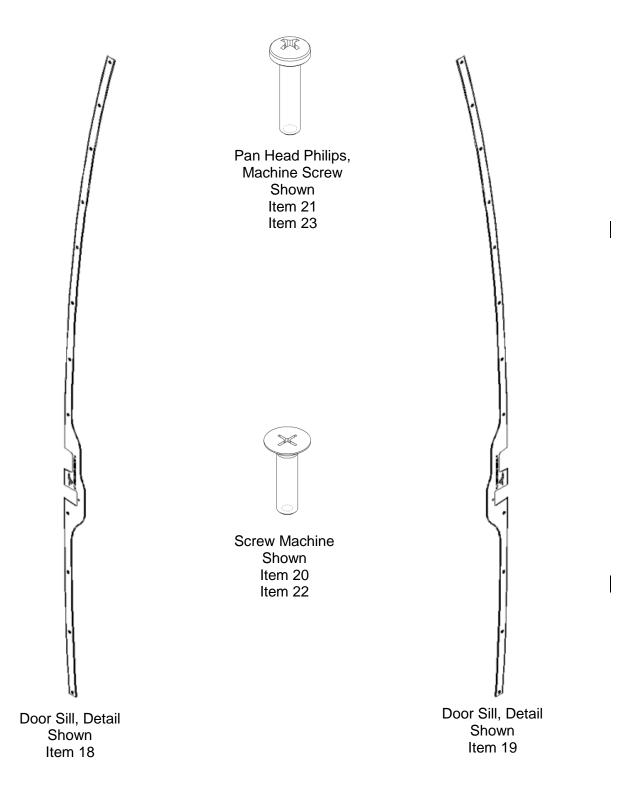

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 20 of 22





					REF				
ITEM	QTY	NUM BER	DESCRIPTION	MATERIAL	STOCK SIZE	SPEC	FINISH	MANUFACTURER	NCAGEC
-	-	AAL-312-020-001	HINGED DOOR FLOOR	C/O SHADED ITEMS					
			PROTECTION, KIT	ONLY					
1	1	AAL-312-021-011	FWD LHS HINGED DOOR	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
'	I		FLOOR PROTECTION, ASSY	147					
2	1	AAL-312-021-001	FWD LHS HINGED DOOR	NA	NA	NA	NA	ALPINE AEROTECH LP	L0171
	'		FLOOR PROTECTION, ASSY	144					
3	1	AAL-312-022-001	FWD LHS HINGED DOOR	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
			FLOOR PROTECTION, DETAIL		14/1				
4	2	151394	VELCRO, DETAIL	LOOP 1000,	2 X 12.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
				BLACK, 8224 PSA	27(12.00				
5	2	151394	VELCRO, DETAIL	LOOP 1000,	2 X 15.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
	_	101001	V ZEGRO, BETT KIE	BLACK, 8224 PSA	27(10.00	OLL IVII IX	OLL IVII IX		
6	2	151405	VELCRO, DETAIL	HOOK 88, BLACK	2 x 12.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
	_	.01.00		8289 PSA		OLL IVII IX			
7	1	AAL-312-021-012	FWD RHS HINGED DOOR	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
•			FLOOR PROTECTION, ASSY	1.2.					
8	1	AAL-312-021-002	FWD RHS HINGED DOOR	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
			FLOOR PROTECTION, ASSY						
9	1	AAL-312-022-002	FWD RHS HINGED DOOR	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
			FLOOR PROTECTION, DETAIL						
10	2	151394	VELCRO, DETAIL	LOOP 1000,	2 X 15.00	SEE MFR	EE MFR SEE MFR	VELCRO USA INC.	11153
	_			BLACK, 8224 PSA		J == 11 11			
11	1	151394	VELCRO, DETAIL	LOOP 1000,	2 X 12.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
				BLACK, 8224 PSA					
12	2	151394	VELCRO, DETAIL	LOOP 1000,	2 x 5.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
				BLACK, 8224 PSA					
13	1	151405	VELCRO, DETAIL	HOOK 88, BLACK	2 x 12.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
				8289 PSA					
14	2	151405	VELCRO, DETAIL	HOOK 88, BLACK	2 x 5.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
				8289 PSA					
15	1	AAL-312-021-003	AFT HINGED DOOR FLOOR	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
			PROTECTION, ASSY			1		 	+
16	1	AAL-312-022-003	AFT HINGED DOOR FLOOR	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
			PROTECTION, DETAIL	L 00D 4000					
17	4	151394	VELCRO, DETAIL	LOOP 1000,	2 X 26.00	SEE MFR	SEE MFR	VELCRO USA INC.	11153
				BLACK, 8224 PSA					

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 21 of 22





					REF				
ITEM	QTY	NUM BER	DESCRIPTION	MATERIAL	STOCK SIZE	SPEC	FINISH	MANUFACTURER	NCAGEC
-	-	AAL-312-020-001	HINGED DOOR FLOOR	C/O SHADED ITEMS					
			PROTECTION, KIT	ONLY					
18	1	AAL-312-022-011	DOOR SILL, DETAIL	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
19	1	AAL-312-022-012	DOOR SILL, DETAIL	NA	NA	NA	NA	ALPINE A EROTECH LP	L0171
20	24	ISO 7046-1-M4 x 16	SCREW, MACHINE	SEE SPEC	SEE SPEC	ISO 7046-1	SEE SPEC	SOURCE AS REQUIRED	NA
21	4	ISO 4045-M4 x 18	PAN HEAD PHILLIPS, MACHINE SCREW	SEE SPEC	SEE SPEC	ISO 4045	SEE SPEC	SOURCE AS REQUIRED	NA
22	24	MS24693-S273	SCREW, MACHINE	SEE SPEC	SEE SPEC	NAS24693	SEE SPEC	SOURCE AS REQUIRED	NA
23	4	MS35207-265	PAN HEAD PHILLIPS, MACHINE SCREW	SEE SPEC	SEE SPEC	NASM35206	SEE SPEC	SOURCE AS REQUIRED	NA

Revision: A

Date: 2016-04-22 Doc. No.: AAL-312-035-701 Page 22 of 22